

## PREPARING FOR INSTALLATION

### IMPORTANT INFORMATION

To prepare for the installation of your Attica hardware, read these instructions.

- Attica hardware is suited to internal applications only.
- Instructions apply to the entire range, including Mortice inserts, handles and accessories to suit various applications.

These instructions should be read in conjunction with any applicable product installation instructions and the Door Care and Maintenance Guide.

### MORTICE INSERTS

- Attica hardware kits include a range of Mortice insert options to satisfy hinged and sliding applications.
- Attica Mortice inserts feature a back-set of 30-34mm, with a maximum pocket depth of 50mm.

### CHANGING MORTICE LATCH HANDING


- Attica Passage, Privacy and Key Lock Mortice inserts are designed to be multi-handed.
- To change the Mortice handing:
  1. Lift the catch behind the latch **UP**.
  2. Push the latch into the Mortice body and **ROTATE** the latch 180 degrees.
  3. **SLIDE** the latch back out of the Mortice body so that the catch falls and locks into place.

### ROSETTE AND ESCUTCHEON INSTALLATION

- It is recommended that Rosettes (featured on the Lever Handle and Turn & Release Hardware), and Escutcheons (featured on the Cylinder) are fitted to both sides of the door prior to installing the Mortice.
- To achieve a tight fit, apply a small amount of wood glue to the machined edges of the door, then insert the Rosette or Escutcheon into pre-machined opening.
- When installing the Mortice, **DO NOT** tighten the face plate screws completely until the Lever Handle, Turn & Release or Cylinder are fitted.
- This will allow some movement in the Mortice to adjust the other fittings.
- **ALWAYS** remember to tighten the Mortice face plate screws before you complete the installation.

### CYLINDERS

- Cylinders are supplied as random key numbers.
- Key alike is not an available option.

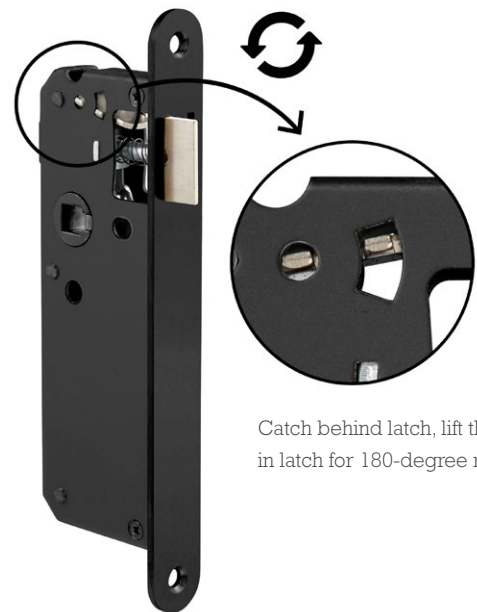


Catch behind latch, lift then push in latch for 180-degree rotation

Passage Mortice

## PREPARING FOR INSTALLATION

### PULL HANDLE – THROUGH HOLE LOCATION

- Doors are not pre-machined to accommodate the installation of the Pull Handle.
- To prepare the door for handle installation:
  - Drill a set of 2-3mm pilot holes 600mm apart and vertically aligned.
  - Enlarged the pilot holes by drilling 8mm hole's part way through the door stile from both sides of the door to suit the 8mm Screw or Thru Bolts.  
Note: Drilling from both sides of the door will help minimise the risk of chip-out.

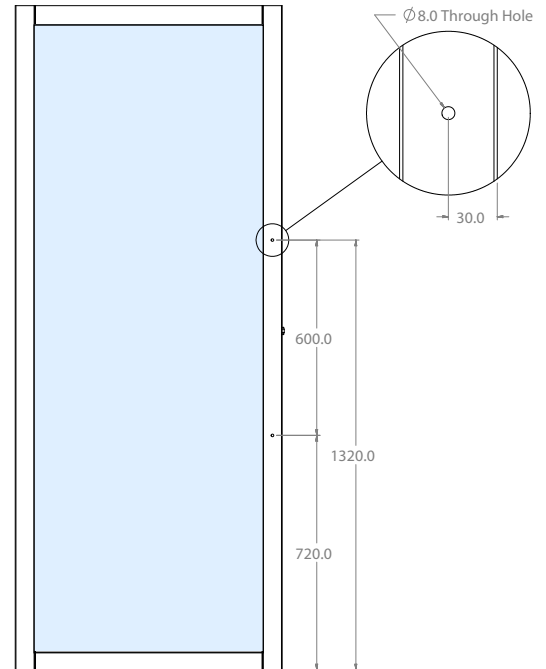

### PULL HANDLE – FITMENT SINGLE & DOUBLE SIDED

- Pull Handles can be installed as either single sided or double sided.
- Single sided handles are supplied as one kit.
- Double side handles are supplied as two kits.
- Each kit is supplied with a range of fixing packs to allow for single or double handle installations.
- Refer to the Pull Handle installation instructions supplied with the kit.

### ATTICA FACE OF WALL TRACK

- Refer to the Face of Wall installation instructions supplied with the kit.


### CONCEALED HINGES

- Concealed Hinges feature 3-way adjustment – vertical, horizontal and depth.
- Once hinges are installed and the colour matched ABS covers fitted, all screw heads are concealed for a clean appearance.

#### CONCEALED HINGE ADJUSTMENT

Vertical	+/- 2.5mm
Horizontal	+/- 2mm
Depth	+/- 1mm

NO.	PART NAME	MATERIAL
1	Body	Zinc alloy
2	Base frame	Zinc alloy
3	Arm	Zinc alloy
4	Pin	304 Stainless steel
5	Cover	ABS

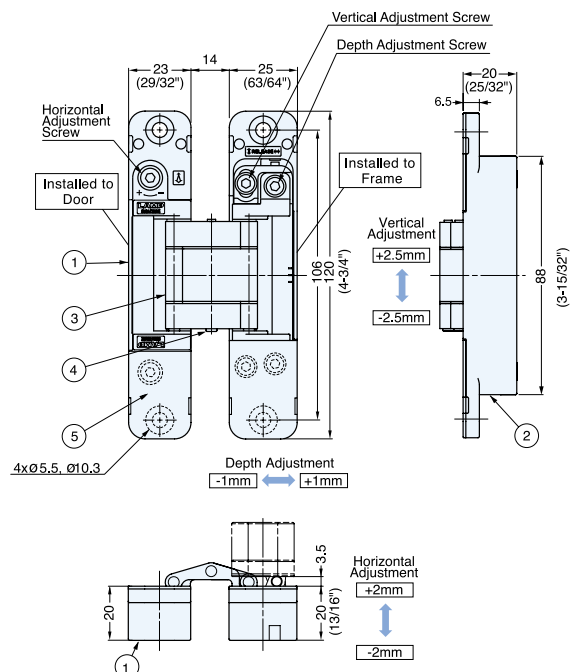

FAILURE TO ADHERE TO INSTALLATION INSTRUCTIONS WILL VOID WARRANTY.  
For full Terms and Condition of Warranty visit [www.corinthian.com.au/about/warranty](http://www.corinthian.com.au/about/warranty)

Corinthian Industries (Australia) Pty Limited is a subsidiary of JELD-WEN Australia Pty Limited. Whilst the utmost care is taken to ensure the accuracy of the information contained herein, it is provided in the understanding that the company shall under no circumstances be liable for any injuries, expenses or other losses which may in any way be attributable to the use or adoption of such data and/or design details. All dimensions indicated are nominal only. Corinthian Doors reserves the right to alter or amend without prior notice data and design details specified herein. Photographs or illustrations may not exactly depict the design or specification and may vary to actual. Doors and products are supplied unfinished unless otherwise specified. [www.corinthian.com.au](http://www.corinthian.com.au) JELD0450 FEB 22.